Vol. 16 APRIL, 1951 No. 4

CORNELL-DUBILIER ELECTRIC CORP.
Hamilton Boulevard, South Plainfield, N. J.

POSTMASTER: If undeliverable for any reason, notify stating reason, on Form 3547 postage for which is guaranteed.

Sec. 34.66 P.L.&R.
U. S. POSTAGE
PAID
So. Plainfield, N. J.
Permit No. 1

WILLIAM A WARD
22875 WESTWOOD RD
CLEVELAND 26 OHIO

C-D's Sealpup

"class" will tell!

You don't need a pedigree to know that SEALPUP comes from a long line of winners! It's the finest metallized capacitor made. Just developed by C-D for ultra-compact military and commercial equipment. Hermetically sealed, brass case, glass-to-metal bonded, it's impervious to humidity!

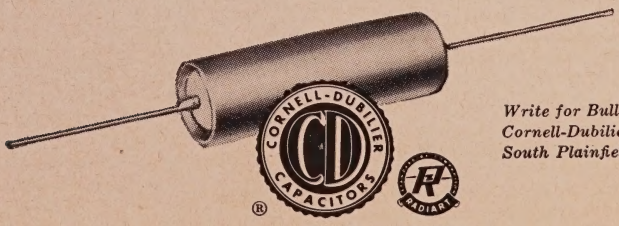

Write for Bulletin NB143
Cornell-Dubilier Electric Corp.
South Plainfield, N. J.

ONSISTENTLY EPENDABLE

CORNELL-DUBILIER

CAPACITORS

Plants in South Plainfield, N. J., New Bedford, Worcester and Cambridge, Mass.; Providence, R. I.; Indianapolis, Indiana; Fuquay Springs, North Carolina, and subsidiary, The Radiart Corporation. Cleveland, Ohio.

METALLIZED PAPER CAPACITORS

By WILLIAM M. BAILEY
Vice-President and Chief Engineer
Cornell-Dubilier Electric Corp.
New Bedford, Mass.

PART I

Use of metallized paper in place of the conventional alternate layers of paper and metal foil has resulted in a new type of paper capacitor that offers distinct advantages in size and weight reduction for many applications. In addition, the new capacitor has a unique self-healing characteristic that provides high reliability for its size.

This article will review briefly the methods used for making metallized paper capacitors and analyze their performance characteristics one by one. Limitations and advantages will be emphasized equally in comparison with conventional paper capacitors, to provide the required facts for choosing intelligently between the two types.

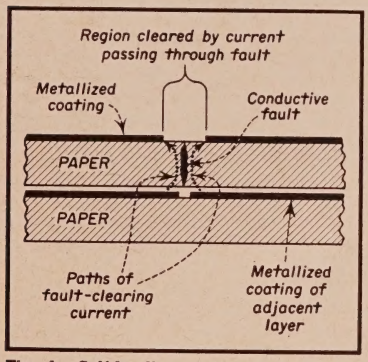

Fig. 1. Self-healing action in metallized paper capacitor.

Basic Concept. The electrodes of a metallized paper capacitor are an extremely thin metal layer that has been evaporated directly onto the insulating paper as shown in Fig. 1. This metal layer is so thin that the energy stored in the capacitor is usually sufficient itself, in case of a breakdown, to melt out or vaporize the metal layer in the vicinity of a dielectric fault. This self-healing action separates the fault in the paper from the metal electrodes by a sufficiently long insulating path to withstand the operating voltage.

The energy required to insulate a fault should be small enough to prevent excessive deterioration of the dielectric near the breakdown point. This necessary condition for self-healing is achieved when the thickness of the metal layer is about one-hundredth the thickness of the usual aluminum foil. Such a thin conducting layer cannot be handled as a self-supporting foil, but can readily be applied directly to the surface of the insulating paper by an evaporation process.

Obtaining Optimum Self-Healing. The effectiveness of a fault-clearing burn-out is dependent on the type of metal deposited on the paper, the specific resistance of the metallic layer, the thickness of the layer, and the structure of the layer. The lower the heat of evaporation, melting point, and boiling temperature, the smaller will be the energy required to get a clean and sufficiently large burn-out of the metal electrode around a fault.

As the metallized layer is made thinner, its electric resistance increases, the burn-out arc quenches itself faster, and the burn-out area is reduced. Thickening the deposited metallic layer, on the other hand, increases the possibility of mechanical destruction of the dielectric. Thicker electrodes also reduce the burn-out area, because with

the greater mass of metal per surface unit the energy available for evaporation boils out less area of metal. There is thus an optimum thickness of metallic layer for a given metal.

For aluminum and zinc, the two metals most widely used for the metallic layer, the optimum thickness is about three-millionths of an inch. Such thin layers of metal cannot carry the high concentration of current that exists in the vicinity of a flaw; in this region, then, the metallic layer acts as a fuse

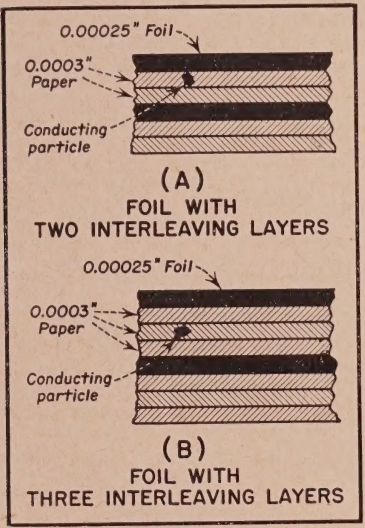

Fig. 2. Conducting particles in capacitor paper makes it essential to use a minimum of two interleaving layers between the foil electrodes of conventional paper capacitors.

and either oxidizes, vaporizes, or melts into isolated globules to insulate the area of the fault from the electrode.

The foil in ordinary paper capacitors is about 250 millionths of an inch thick. This foil can carry the short-circuit current produced by a fault, hence ordinary paper capacitors stay short-circuited permanently once a fault develops.

How Conventional Paper Capacitors Fail. Breakdown in a foil-paper capacitor may be **thermal** due to excess heat causing deterioration of the dielectric at the hottest spot, or **electric** due to sudden application of a voltage exceeding the breakdown electric field strength at some weak point in the dielectric. In either case, ionization takes place in the residual gas between the layers or in the insulating paper itself. This action builds up rapidly due to further ionization by collision of electrons, producing an avalanche of ions and electrons that destroys the dielectric mechanically. With no dielectric at the location of the breakdown, the metallic electrodes virtually are connected together and short-circuit the conventional foil-paper capacitor. It must then be discarded.

Faults in Capacitor Paper. In the manufacture of capacitor paper it is impossible to avoid small holes in the paper, and equally impossible to avoid inclusion of small conducting particles. In winding a conventional paper capacitor made with only a single paper layer, it would therefore, be short-circuited the instant a conducting particle was reached. For this reason, conventional units require at least two layers of paper insulation, as in Fig. 2A. For the lower voltage ratings two layers are sufficient because there is slight probability of two faults in the paper coinciding with each other. For higher voltage ratings more inter-leaving layers of paper are needed, as in Fig. 2B.

The smallest number of layers with which a standard foil-paper capacitor can be wound is six, as shown in Fig. 3A, since there are two foil layers and each requires two paper layers. The corresponding metallized construction, in Fig. 3B, requires only two layers, which greatly simplifies manufacturing problems. There is even a type of metallized paper construction, using a comb-shaped pattern of metallized coating, that requires only a single layer and provides the ultimate simplicity in capacitor winding.

In figuring the voltage rating of a conventional paper capacitor, one of the sheets of paper cannot be considered as

insulation because of the conducting flaws in the paper. Thus, a unit with two layers of paper is considered as only one layer from a voltage breakdown standpoint; likewise, three layers count as two, and four as three. This makes the conventional paper capacitor much bulkier than it would be if a perfect insulating dielectric were obtainable.

The extra layer of paper is eliminated in metallized paper capacitors not by getting a more perfect insulating paper, but instead by isolating each flaw in the paper automatically during manufacture.

Making Metallized Paper Capacitors. A brief review of methods used in preparing, winding, impregnating, and housing metallized paper capacitors will aid in understanding the special features of these capacitors. This background information, equivalent to that obtained by a trip through the Cornell-Dubilier factory in New Bedford, Mass., will greatly assist in choosing between conventional and metallized paper capacitors for each particular application.

Lacquering the Paper. Though the surface of highly satinized capacitor paper appears smooth to the naked eye, it is by no means even. Under examination in an electron microscope, the paper is seen to have fibers, crags, and valleys amounting to a thickness variation of almost half the nominal thickness, as in Fig. 4A. If metal were evaporated onto such a surface, the metal vapors would penetrate the depressions and pores of the paper, producing sharp points that would reduce both the ionization voltage and breakdown strength of the capacitor. For this reason, an insulating coating such as lacquer is applied to the capacitor paper before it is metallized. The lacquer fills the depressions, as in Fig. 4B, leaving a smooth surface on which metal can be deposited.

Metallizing the Paper. Zinc and

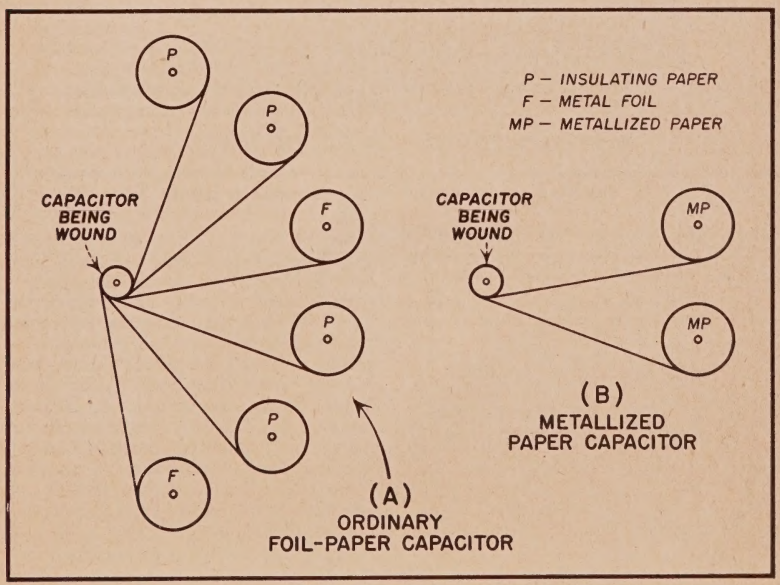

Fig. 3. Comparison of winding machines required for the two types.

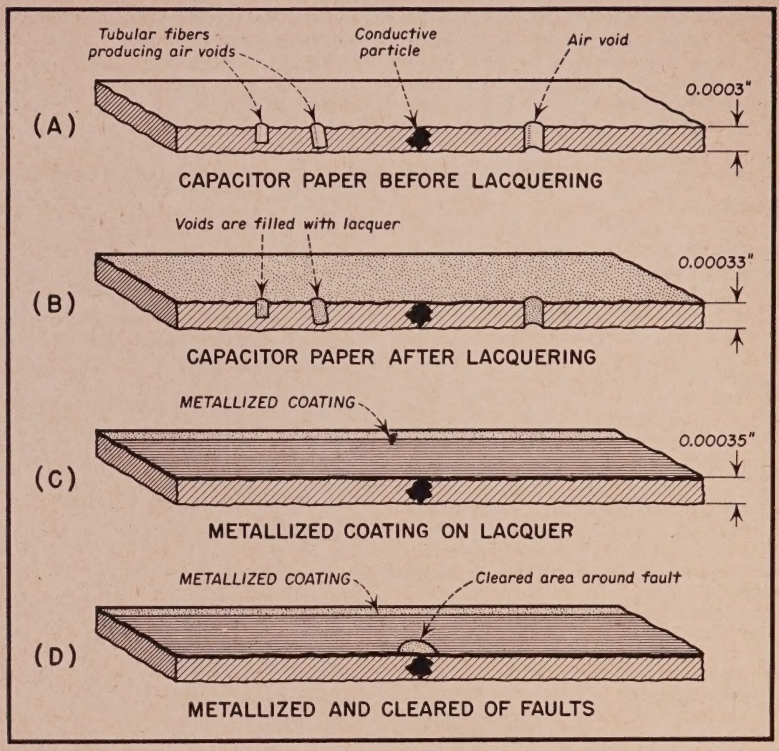

Fig. 4. Steps in making metallized capacitor paper.

aluminum are the two metals most widely used for metallized layers. Both are deposited by evaporation of molten metal as the paper is moved past in a large vacuum chamber. Zinc, which boils at about 500°F., can be evaporated from an electrically heated crucible inside the chamber, using relatively simple equipment. Aluminum with its higher melting point and higher corrosive action in the molten state cannot be evaporated from crucibles; instead, it must be evaporated off a tungsten heating wire in the chamber under carefully controlled conditions.

The metallizing process is a batch process, wherein usually one roll is coated at a time. The vacuum chamber is heavy steel with external controls by which the process can be controlled once started. The lacquered paper roll and the aluminum are properly placed therein, the chamber is sealed and pumped down, the electric heating element inside is energized to evaporate the metal, and the electric motor is started that moves the paper past the evaporated metal cloud at precisely the correct speed to give the desired thickness of metal deposit on one side of the paper, as in Fig. 4C.

One disadvantage of zinc is its vulnerability to moisture, which eats away the zinc coating and reduces the capacitance correspondingly during use. Seal-

ing against moisture is thus extremely important when the coating is zinc.

Another drawback of zinc is its higher electrical resistance than aluminum, which results in a slightly higher power factor. This is of little or no consequence in telephone work, but may be important in other applications. In Europe, however, zinc is widely used as the metallized coating for practically all applications, and performance is claimed to be entirely satisfactory there.

Aluminum is the metal used for the coating in most metallized paper units on the market in this country. The speed of the paper and the rate of evaporation of the metal in the vacuum chamber are carefully controlled to produce a metallized layer about 3 millionths of an inch thick, which gives the optimum compromise for the various factors affecting performance characteristics.

Margins. Metallizing is applied to relatively wide rolls of paper for economic reasons, and the coated rolls are subsequently slit to the desired widths. Once the paper is in the final width, the metallized coating must be removed from one margin of each small roll to provide insulation against shorts when the capacitors are wound. The metallized paper is run over one metal contact roll to another roll that is insulated except for the width of the desired margin, and the foil in this marginal area is burned off by applying a voltage of appropriate value to the two metal rolls. The metallized layer is burned off by the high current density resulting from the voltage. An alternative procedure, used chiefly with zinc, involves masking the blank paper during the evaporation process to leave the required insulating margins.

Preliminary Fault-Clearing. Before the metallized paper is slit into the final widths, it is usually run between two metal rolls between which a voltage is applied. This removes the metallized coating from the vicinity of each fault one by one, as in Fig. 4D. If all the faults were left for simultaneous clearing after winding, much heavier fault-clearing currents would be needed and there would be danger of damaging disruptive discharges.

Winding. Metallized paper capacitors are generally made with noninductive construction. This is achieved by winding the units from two rolls of metallized paper with the insulating margins at opposite ends, as shown in Fig. 5.

Use of two metallized layers with oppositely positioned margins provides each end with an insulating margin as well as electrode extensions so that opposite electrodes project at opposite ends.

Comb-Pattern Printing. Another type of metallized paper capacitor construction requires only a single layer of metallized paper, giving easier winding and still more compact construction. Instead of providing an insulating margin along one side of the strip of metallized paper, the foil is burned off in a comb-shaped pattern as shown in Fig. 6 to separate the metallized layer into two sections. The pattern is so designed that the length of each rectangular cycle of the pattern is equal to the circumference of the turn on the capacitor at its position in the roll. Thus, the width of each rectangular pulse of pattern increases by 2 π times

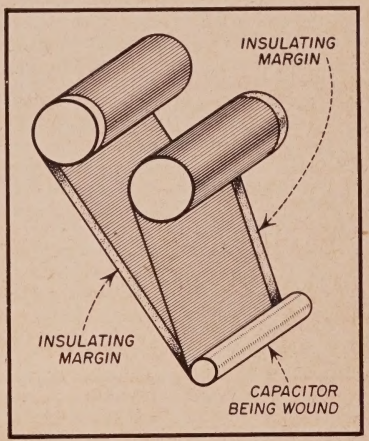

Fig. 5. Two-layer winding arrangement used in metallized paper capacitors.

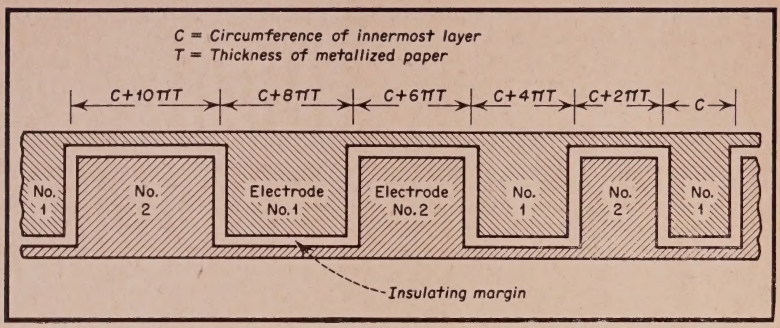

Fig. 6. Comb-pattern arrangement giving single thickness of paper between electrodes.

the thickness of the paper (about 6.28 times 0.00035 inch for standard metallized aluminum paper). When this condition is met, the rectangular pulses are directly over each other on succeeding turns, with alternate pulses connected to opposite ends of the roll. The ends of the finished roll can then be sprayed with molten copper for connecting purposes just as mentioned below with two-layer construction.

The comb-shaped pattern-printing technique was developed by Hunt in England, and is widely used there. In the United States it is used chiefly for low-voltage capacitors with small capacitance values.

Burning of the comb-shaped pattern requires a separate burning wheel for each size of capacitor. The circumference of the pattern wheel must equal the total length of paper in the capacitor, and the embossed pattern on the wheel must be precisely machined to meet the requirement that the rectangular pulses exactly overlay on all wound layers.

Higher voltage ratings are obtained with comb-pattern metallized capacitors by spreading out the metallized rectangles as in Fig. 7, so there is one full turn of insulating paper between adjacent pulses. This gives in effect two layers of paper between the electrodes, even though only a single strip is wound as before.

Molten Spraying of Ends. After metallized paper capacitors are wound, molten copper is sprayed over each end through a masking arrangement that leaves an uncoated strip across the diameter of each end for entrance of the impregnant. The insulating margin on one edge of each sheet of metallized paper is wide enough so that the molten spray cannot penetrate enough to reach the electrode of opposite polarity. The copper coating is next tinned by spraying molten solder on it, to facilitate later soldering of terminal leads. **END PART I.**

(PART II will follow in May Issue)

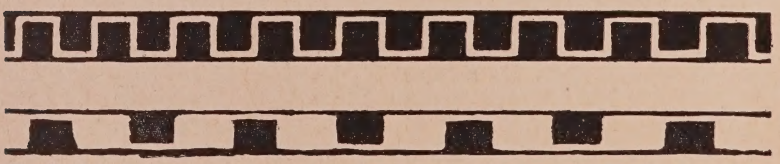

Fig. 7. Actual-size reproductions of comb-pattern metallized paper. The black portions of the pattern are the metallized part of the paper strip. Upper pattern is used where only one thickness of paper is needed between the electrodes, while lower pattern is for higher-voltage capacitors requiring two thicknesses of insulating paper.

NOW AVAILABLE!

C-D DUAL CERAMICS

CAPACITIES:	PART NUMBER:
2x100 mmf.	6TM5DT1E Tol. +50,—20%
2x1000 mmf.	6TM5DD1B
2x1500 mmf.	6TM5DD15C
2x2000 mmf.	6TM5DD2C
2x2500 mmf.	6TM5DD25C
2x3000 mmf.	8TM5DD3C
2x4000 mmf.	8TM5DD4C
2x10,000 mmf.	8TM5DS1C

guaranteed minimum capacities:

TYPICAL CURVE
CAPACITY CHANGE VS. TEMPERATURE
5000 MMFD. MINIMUM GUARANTEED VALUE

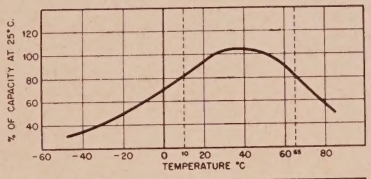

TYPICAL CURVE
TEMPERATURE COMPENSATING UNITS
CAPACITY CHANGE VS. TEMPERATURE

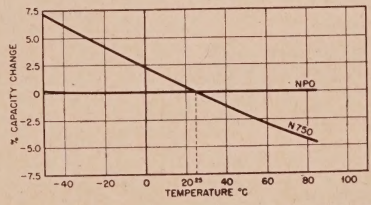

• Small • Space-saving • Lightweight • Ideal capacitor construction • Low inductance • Stable, dependable performance • Fully insulated • Capacity clearly stamped in mmf. for capacities under 1000 mmf., and in mfd. for capacities of 1000 mmf. (.001 mfd.) and over.

Order C-D Dual Ceramics from your Cornell-Dubilier jobber today. Write for catalog. CORNELL-DUBILIER ELECTRIC CORPORATION, South Plainfield, New Jersey.

OTHER PLANTS IN New Bedford, Cambridge and Worcester, Mass.; Providence, R. I.; Indianapolis, Ind., and subsidiary, The Radiart Corp., Cleveland, Ohio.

41st ANNIVERSARY
CORNELL-DUBILIER CAPACITORS
1910-1951

CORNELL-DUBILIER
CAPACITORS
BEST BY FIELD TEST

RADIART SUBSIDIARY

SEE YOUR LOCAL CLASSIFIED TELEPHONE DIRECTORY FOR NEAREST C-D JOBBER.

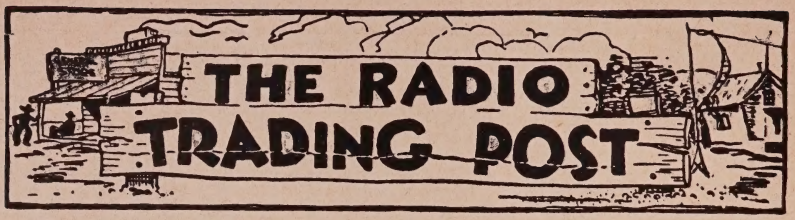

A Free Market-Place for Buyers, Sellers, and Swappers.

These advertisements are listed FREE of charge to C-D readers so if there is anything you would like to buy or sell, if you wish to obtain a position or if you have a position to offer to C-D readers, just send in your ad.

These columns are open only to those who have a legitimate WANTED, SELL, or SWAP proposition to offer. The Cornell-Dubilier Electric Corp. reserves the right to edit advertisements submitted, and to refuse to run any which may be considered unsuitable. We shall endeavor to restrict the ads to legitimate offers but cannot assume any responsibility for the transaction involved.

Please limit your ad to a maximum of 40 words, including name and address. Advertisements will be run as promptly as space limitations permit.

All ads are published in the order received, but those held over two issues are discarded. Every effort will be made to include your ad either in the issue being prepared or the succeeding number, but will be automatically dropped thereafter.

FOR SALE—Modulation xformer for PP 6L6s Stancor 3868, $2.50; Fil xformer 5V, 16A Stancor 52B052, $3.50; Mark 2 with ant, tuner, mike, phones, power supply, unconverted, $35; 40 meter 50 watt center link coils ceramic base, 50 cents. All items excellent. George F. Gnandt, Wellington, Ohio.

FOR SALE—Rider Manuals at half price; Sams 1, 2, 3, at half price; Rider Chanalyst, A-1 cond., $75; counter (Grant meter) tube checker. Carrs Television Center, 15-17 Kelley Square, Worcester 4, Mass.

FOR SALE—Superior model 450 light oak portable in perfect condition with operating charts, $25. Check or money order shipped express collect. Morton's Radio 8 Sisson St., Potsdam, N. Y.

FOR SALE—Philco radio model CT11 complete with all tubes and cable, excellent, $7.50 c.o.d. Want Craftsman hand and power tools for carpenter and plumber. Cash or trade, Victor Kozma, 1665 Stadium Ave., N. Y. 61, N. Y.

FOR SALE—Meissner signal shifter, factory built model EX with 10-20-40-80 mtr. coils, FMX phase modulator and power supply. All excellent condition, $90 f.o.b. Howard Wilson, 809 No. 4th St., Mankato, Minn.

FOR SALE OR TRADE—2 diamond phono needles, $7.50 each. Or trade for VOM or what? J. W. Landon, Wayne, W. Va.

WANTED—Instructograph or Gardiner code "teacher" in good condition, with or without tapes. Also want signal tracer in good condition. George Crist, Litchfield, Mich.

FOR SALE—BC-221 freq. meter, complete with 1000 kc. crystal and calibration book. Power supply, modulation, and pilot light built in. In good shape, $80. Ray Doornbos, 2529 Brook Dr., Kalamazoo, Mich.

FOR SALE OR TRADE—Emerson battery portable with tubes, less batteries, $10. Also have many used radio chassis and a.c-d.c. radios. Louis A. Goldstone, 1279 Sheridan Ave., Bronx 56, New York.

FOR SALE—Precision E-200 sig. gen., $48; Precision 844P, VOM, $28; G. E. TC3 tube tester, $45; Weller soldering gun, $10. Or all four for $120. Send for list. Eugene Perkins, 1857 Arlene Ave., Dayton 6, Ohio.

WANTED—One VVC60-20KV; two VC25-20KV or 32KV vacuum capacitors. Must be reasonable. C. Borysevich, 1066 President St., Brooklyn 25, N. Y.

TRADE—Television tubes 10BP4, 12LP4, and television projection parts. Logan T.V. Service, 1128 Wagner Ave., Philadelphia 41, Pa.

WANTED—A new or used 6V7 radio tube. State price. Leo Teply, Geddes, So. Dak.

WANTED—Rider's Manuals, Nos. 11, 16, 17, 19, and 20. State volume number, price wanted, condition. J. O. Basham, Altamont, Covington, Va.

FOR SALE—Meissner 8-C FM tuner, $25. Also Brush RC-20 cutter and PL-20 pick-up, make offer. C. LeRoy, 3066 Livingston Rd., Cleveland 20, Ohio.

SALE OR TRADE—30-06 M17 Enfield rifle converted to sporter, military sights removed, new J 2.5 telescope added, perfect condition. Will sell or trade for receiver, or TV set in good cond. Tom Dugan, P.O. Box 411, Syracuse, N. Y.

FOR SALE—Radio Craft, all issues 5 years, '44, '45, '46, '47, '48, good cond. First reasonable offer. Ship express collect. Harry Hickey, Benld, Ill.

WANTED—Hallicrafter S-38B or similar type, Meissner FM tuner, in good cond. only. Ernest Mueller, 44 Carlton St., East Orange, N. J.

FOR SALE—National N. C. -109 FM tuner, table model case, perfect condition, best offer. Roy Gallagher, Mon-Yough Broadcasting Co., Inc., Mc Keesport, Pa.

SELL OR TRADE—Electro-Voice crystal microphone, model Cardax 950, $15. Want good used 12-15" speaker or Pilotuner, or Livingston pickup with GE reversible cartridge. A. Brown, 2463 E. 15 St., Brooklyn, N. Y.

FOR SALE—Tubes and stock from recently closed service shop. Also American Flyer Train sets, radio test equipment. Send for list. B. Blatt, 8 First St., Haverstraw, N. Y.

SELL OR TRADE—1936 Ford truck. Want scope, Heathkit, or any other worthy scope kit, or a small short wave rec. Al J. Faiella, 76 Dayton St., Newark 5, New Jersey.

WANTED—AN/APR-4 rec., tuning units; ARC-1, ARC-3, TS-174/U, radar, lab equipment, tubes, etc. Price and describe in first letter. Littell, Farhills Box 26, Dayton 9, Ohio.

FOR SALE—18 Photofact binders in good condition, $45. Or $2.75 in broken lots. R & D Radio & Appliance Serv., 110 S. Union St., Dodgeville, Wisconsin.

WANT—Radio course (up-to-date). Also signal generator and other testing equip. Must be for 25 cycle. Give full details. Wesley Kay, 230 Wyandotte St. East, Windsor Ont., Canada.

WANTED—12 volt to 50 volt filament type receiving tubes at lowest prices. Will also trade, equal value, in tubes. Send your list for ours. Madlinger's Radio Service, 478 Woodward Ave., Brooklyn 27, N. Y.

SELL OR TRADE—4 x 5 enlarger, timers, electronic time switchers, photo analyzer (densitometer), cameras, and complete darkroom equipment. Want communications and/or FM receiver. J. R. Floyd, 4300 Rusk, Houston 3, Texas.

FOR SALE—5" Eico scope latest model for FM-TV; model 288X Hickok sig. gen.; Weston VOM model 677; NRI resistor-cond. tester, Heath battery eliminator. Best offer. Robert M. Martin, Box Q, Umatilla, Fla.

FOR SALE—Two 8" electromagnetic speakers, both $11; also one 10", $10; Federal enlarger model 219, $25; 2 Shurite 0-15 voltmeters, a.c.-d.c., both $3.25; GE radio, $15; 120 magazines, $18. Charles Radio Service, 170 Barbey St., Brooklyn 7, N. Y.

FOR SALE—Back issues "Radio Broadcast," Dec., 1925, to April, 1930, inclusive; "Radio," May, 1925, to May, 1928, inclusive, also January, 1929, March, 1929, July, 1930. Make offer. Eugene B. Carman, 68 Homestead Ave., Bridgeport 5, Conn.

SELL OR TRADE—Eico signal generator, excellent, factory built, $45. Leonard Cammarata, 2225 West 5th St. Brooklyn, New York.

SWAP—National NC-108 FM; RCA 30 watt amplifier; Presto J-5 recorder; Vomax VTVM; 2¼" x 3¼" Busch Pressman, photo equip.; power tools, etc. Want anything philatelic. Stanley Roszewski, 22 Ellington Ave., Rockville, Conn.

TRADE—Simpson model 29 heavy duty dual movement direct current milammeter, 4½" scale, 150-0-150 ma. Want pocket VO or VOM, or what have you? Joseph R. Cooper, 1096 West Farms Rd., New York 59, N. Y.

SWAP—National FB-7 receiver with preselector unit, complete with three sets coils (A, B, C) and power supply. Want general stamp collection, 1940-50. Frank A. Arsenault, 1184 W. 11th St., San Pedro, Calif.

FOR SALE—Riders Manuals, 9-14 inclusive; Precision EV-10 VTVM with RF-10 probe; E-200 sig. gen.; and 912-P tube tester. Good condition. A. J. Counradt, 20 Fairfield Ave., Jamestown, N. Y.

FOR SALE—Sylvania 7" service oscilloscope, type 132, excellent, $95. Joe's Radio-Television Serv., 330 Garfield St., Nanticoke, Pa.

FOR SALE—75 watt Masco amplifier, $50; 2 Turner dynamic mikes with stands, $40; University 25 watt horn, $25. All good condition. M. Kanner, 3326 Mermaid Ave., Brooklyn, N. Y.

SELL OR SWAP—Presto K-10 disc recorder; Meissner EX sig. shifter; tapes for TG-10 keyer; Rider's 1-17; PE103 dynamotor; Hallicrafter SX-17 rec; test equip.; ham gear. Brown Taylor, 717 Currey Rd., Nashville, Tenn.

FOR SALE—Sacrifice due to ill health: Precision tube and bat. tester; Superior tube and set tester; Superior S.G. Feiler TS-2 sig. analyzer; Aerovox capacitor tester; pocket VOM meter. J. M. Merrill, 493 E. 164 St., Bronx 56, N. Y.

FOR SALE OR TRADE—Fada FM tuner; Eicor tape recorder; G.E. tube tester; RCA 16mm motion picture machine. What have you? Wm. P. Henninger, 27 N. Market St., Elizabethville, Pa.

TRADE—Transmitter and rec. models 407A and 736J, complete. Want General Radio Impedance bridge model 650A and oscillator 650-P1 or Twin-Trax model 710B or 810B tape recorder. New York City preferred. G. W. Robin, 1552 Dahill Rd., Brooklyn 4, N. Y.

FOR SALE—Philco auto radio, model CT11, complete in excellent working cond., $7.50; Hoover vacuum cleaner, model 700 in working order, $5. V. Kozma, 1665 Stadium Av., New York 61, N. Y.

TUBES WANTED—Send your list indicating details for my cash offer. B. N. Gensler, 136 Liberty St., New York 6, N. Y.

SELL OR TRADE—Collins FM tuner, cost $125; Collins AM high fidelity TRF tuner, cost $135. Both for $200 or late model 12 to 16 h.p. Johnson or Evenrude outboard. Fred E. Saron, 844 E. 13th St., Brooklyn 30, N. Y.

FOR SALE—Excellent auto radios, Motorola model 608, 508, and 708 Tucker. George Lufku, 5427 Homer Ave., Cleveland 3, Ohio.

FOR SALE—Late model RME69 with matching speaker, crystal filter, and noise limiter. Has had excellent care by owner. Schematics included, $60 f.o.b. Detroit. Wm. W. Skinner, 6208 Neff Rd., Detroit 24, Mich.

WANTED—Riders Manuals 1 to 8 incl., 12, 13, and 15. State price. Bert Polfus, 1236 Monroe St., Benton Harbor, Mich.

FOR SALE—Higgins 22 cal. rifle, model 10316, $15; R.C.P. multitester, model 450A, $20; modern Western Elec. dial telephone, $15. All items in A-1 cond. Lewis Mascara, 197 McKay Ave., Huntington Sta., L. I., N. Y.

WANTED—Instructions for Triplett professional, all-wave, all-purpose tester, model 1175-B. Also second-hand radio books, or any other equipment to get me started in radio. M. Boland, 769 St. Marks Ave., Brooklyn 13, N. Y.

WANTED—Model E-200C Precision signal generator. Should be in working cond. Clifford D. Lessig, R.D. 1, Riegel Ridge Rd., Milford, N. J.

SWAP—Simpson 240 multi-meter in leather carrying case for Briggs-Stratton gas motor or ? G. E. Cline, Box 701, Emmett, Idaho.

WANTED—Beat-up BC459 with oscillator section still o.k. State cash price. Must be BC459 only. C. Gabler, 1307 Merriam Ave., New York 52, N. Y.

WANTED—Short wave receiver, such as National or Hallicrafter. Send description and price. H. Latko, 1922 Dickens, Chicago, Ill.

WANTED—Oak Ridge signal generators, model 103 or 104, or good tube tester. Have cash and following to trade: enlarger for 7" or 10" TV set, Precision 832-S multitester, rifles, revolvers, etc. John Arnold, P.O. Box 84, Bluffs, Ill.

WANTED—Second-hand radio test instruments. Inquire by mail. G. Rolloff, 73 E. 121 St., Apt. 3, New York City, N. Y.

FOR SALE—Riders Manuals, 1, 3, and 4, complete no pages missing, $4 ea. Also Philco model 070 sig. gen., works but needs minor repairs, best offer. Floyd F. Price, R. D. 1, New Haven, Ky.

FOR SALE—Radio equipment and books; 7 radios, table models, from 1941 to 1949; also tubes and other items. Write for list. Hersh Walk's Radio Service, Morrisdale, Pa.

FOR SALE—Fieler Electronic Stethoscope, model TS-3A, excellent cond., factory built, operating instructions included. Cost $35, will sell for $25. Stanley Silvia, 16 North St., New London, Conn.

FOR SALE—Precision EV-10, VTVM, perfect cond. Precision 954G portable tube checker and set tester, battery tester, latest tube data and adaptors. Like new. Best price. Allan Matros, 5409 - 3 Ave., Brooklyn 20, N. Y.

FOR SALE—U. S. television projection set, T-530, 36 tubes, 22'' x 30'' screen, 4-band AM - FM - SW radio, needs repairs. Cost $1600, sell for $250 f.o.b. V. R. Hein, 418 Gregory St., Rockford, Ill.

FOR SALE—Model 180 wire recorder, complete with two removable take-up drums and about 8 hours of wire, used very little, good condition. Will sell cheap. Melvin E. Barnette, Box 154, Pendleton, S. C.

FOR SALE—Recently purchased Hammarlund Super-Pro SP400-X, complete. Best offer. Vincent Pellettieri, 5523 - 31 Ave., Woodside, L. I., N. Y.

FOR SALE—Store, Radio-Television-Appliance, Sales-Service. Complete, tools, equip., stock, parts, tubes, 2,000 customers. Also 3 room apt., steam heat - hot water, $40 rental, est. 19 yrs. M. Funk, 114 Ralph Ave., Brooklyn 21, N. Y.

WANTED—One or more tape-type decoding machines with tape puller and stylus in good cond., motor or spring drive. Please quote price and all particulars. Metropolitan Radio Service, 4387 Elston Ave., Chicago, Ill.

FOR SALE OR TRADE—Rider Manuals, 1 through 13, complete, $160, or will take laboratory type oscilloscope or modern Mutual Dynamic tube tester. G. E. Howarth, 216 First Ave. East, Oskaloosa, Iowa.

SALE OR SWAP—Have Lionel train and accessories in excellent cond., cost $90. Will swap parts or whole for the following Heathkits in excellent condition: electronic switch, signal tracer, battery eliminator, audio generator, or condenser checker. R. J. Sandretto, 590 Furlong Rd., Sebastopol, Calif.

FOR SALE OR TRADE—Ham station, tubes, extras, etc. Need scope, tube checker, sig. gen. Also need watchmakers lathe, stake, jeweling set, cabinets, etc. R. A. Williams, R 1, Box 210A, Redlands, Calif.

SELL OR TRADE—Radio tubes, all hard to get types, want quantities traded in 7, 10, and 12 inch TV sets, also good used pic. tubes if cheap. Write for lists. Ray Rowell Radio, 1640 Steiner Ave., Birmingham, Ala.

WANTED—1927 to 32 radio sets, must be in working condition and original speakers, for a.c. Chester Wagren, 51 North Central Ave., Buffalo 12, N. Y.

FOR SALE—Coin operated timers, complete with coin slot and money box with lock. Operate one hour for 25 cents. Suitable for coin operated radios. $2.50 eccb. McKay Radio, 4015 MacArthur Blvd., Oakland 19, California.

FOR SALE—Radio sales and service business. Well established, pays well, 20 years in same location, city of 22,000 with large trade area. W. S. Hillsman, 205 N. DeLeon St., Victoria, Texas.

FOR SALE—T-23/ARC-5 xmitter, with tubes, less crystals, $20; MD-7/ARC-5 modulator with dynamotor, $10; C-40/ARC-5 control unit, $2. All excellent. E. J. Mack, 82 B'way, Bayonne, N. J.

TRADE—Receiving tubes, meters, transformers, and other radio gear. Want an inexpensive enlarger, 35 mm camera, and other photo supplies. I can also use some radio test equipment. Roman Spinner, 1236 Ave. S, Brooklyn, N. Y.

SALE OR TRADE—Intercom system, Philcophone. Two pushbutton master stations each with six station capacity and eight staff stations to call one master. Good condition, will trade for hi fi amplifier. B. H. Gerard, East Parkway at Central, Memphis 4, Tenn.

FOR SALE—Meissner 8C FM tuner in factory carton, used about 2 months, perfect cond., cost $44.08. My price $35 f.o.b. Harold Garrett, 711 S. New York, Sedalia, Mo.

FOR SALE—Two RCA 833-A with 1 Johnson socket, $45; two C-D 25 mfd., 2,500V d.c. photoflash capacitors, $10 ea.; two 230V a.c. Superior powerstats 3 A., 810 VA. $12 ea. All above good cond. Arthur Koehler, 130 Wadsworth Ave., New York 33, N. Y.

SELL OR SWAP—Sams 1 to 8 like new, binders. Want tape recorder, camera, movie equip., adding machine, hand printing press, new 600-16 tires, ½'' elec. drill, bench grinder or drill press. Andre Chapdelaine, 122A No. Quinsigamond, Shrewsbury, Mass.

TRADE—26 new Duotone No. 12 Ls. sapphire recording needles listing at $5.50 ea. Want 1951 Heathkit oscilloscope kit or used Hallicrafter receiver. Also have good Kodak syncro flash unit No. 2. P. Lachance, 26 Howard St., Lewiston, Maine.

WANTED—Precision model E-200C signal generator. Must be in A-1 shape. Will pay cash. Chas. S. Brotzman, 173 Main St., Mexico, Maine.

WANTED—Cheap radios, radio books, radio parts, photo equip., etc. Send details and prices. S. Asif Akhtar, Jafri Shop, Mahiar Mansion, Jackson Road, Keamari, Karachi, Pakistan.

FOR SALE—Complete files of transactions Inst. Radio Eng., 1920 to date; also Q.S.T., 1923 to date; all bound in brown cloth. Make cash offer. J. C. Jensen, Nebraska Wesleyan University, Lincoln 4, Nebraska.

FOR SALE—NRI VOM vacuum tube, 20,000 ohms per volt, ranges - d.c. 0-450 - a.c. 0-550 ohms, 0-100 meg., operating instructions and schematic diagram, less batteries, $10 postpaid. Ben Marconi, 120 Gatling Pl., Brooklyn 9, N. Y.

FOR SALE—Hallicrafters S40A receiver in excellent condition, $60. Joseph Zamoyta, 21 Lincoln Pl., Brooklyn 17, N. Y.

FOR SALE—G.E. JFM90 FM tuner in a distinguished handsome cabinet simulating a set of books. Excellent condition, $15. N. Hulemark, 130 - 75th St., Brooklyn 9, N. Y.

FOR SALE—Rider Manuals, 1-5 abridged, 6, 7, 10, 12, and 13 in excellent cond. with index for 1-10, $70 postpaid. Magazine back issues for ½ publisher's price. James Ahlgren, 1807 H St., N. W., Washington 6, D. C.

SELL OR TRADE—Have about 25 magnifying lenses, various sizes, types, and colors. Write for listing. Will accept reasonable offer for entire lot. T. J. Feibleman, 1803 Louisiana Ave., New Orleans, La.

WANTED—McMurdo-Silver 701 transmitter, with coils for 10 and 20 meters. Also need xtal and pwr. supply. Will pay cash. H. J. Burton, AFS Field Engineer, 625th AC & W Sqdn., APO 942, c/o P.M., Seattle, Wash.

FOR SALE—Rider Manuals, 1 to 17 inclusive. 1 to 5 condensed in 1 vol. No. 13 missing. Total of 12 books, $120. Dunbar's Radio, 571 Edinburgh St., San Francisco 12, Cal.

SELL OR TRADE—Surplus receiver in excellent condition, similar to the BC-348, but much better. Write for details and photograph. Want TV set. R. H. Bender, 329 Perry St., Columbia, Pa.

FOR SALE OR SWAP—Elkhart silver plated trumpet in excellent condition, $40 cash, shipped prepaid; or stamp collection worth $40. Will swap for wire or tape recorder in good running cond. W. Donald Curtis, Box 13, Watson, La.

FOR SALE—Eico model 425 push pull scope, factory aligned and in excellent working condition, all instructions and papers included, $45. Joseph A. Frazier, 8510 Packard Ave., Van Dyke, Mich.

WANTED—Late Nilson's Master Course in Radio Communication for cash. L. C. Chapman, Rt. 1, Fairhope, Baldwin Co., Alabama.

WANTED—TV service instruments. State price and condition. Blais' Radio Service, 282 Pleasant, Berlin, N. H.

WANTED—Hallicrafter or any communication BC 348. Need one 200 to 500kc. Florida Air Srv., Radio Div., Box 6284, Jacksonville, Fla.

FOR SALE—TV chassis, 3" x 15" x 20", complete with 21 sockets, terminal strips, layouts for parts, $3.50 plus shipping charges. Aladin Radio Service, 202 Schiller St., Buffalo 6, N. Y.

FOR SALE OR SWAP—RCA 621TS 7" magnetic deflection TV receiver, good working condition, complete. First $50, or what have you? Jack M. Gutzett, 75-02 168 St., Flushing, L. I., N. Y.

FOR SALE—Janette rotary inverter, 110V d.c. - 115V a.c., 300W, $50; 25W phono inverter, $4; Webster 156-1 changer $9. Barton Koslow, 515 West End Ave., New York 24, N. Y.

FOR SALE—Volumes 7, 8, and 9 of Rider Manuals. All in perfect cond., $6 ea., c.o.d., or all three manuals for $15. Thurk's Radio & Appliance Co., Woodsboro, Texas.

FOR SALE—Doz. Solar surplus condensers, 2 x 3500 MF at 25V, $2 ea. c.o.d. Also some 4.5 MC IF coil air trims, $1 ea. c.o.d. B. Gallina, 380 N. 7 St., Newark, New Jersey.

FOR SALE—Turner microphone, excellent freq. response, model 20X, with 5 yards cable and plug, nearly unused, $5. A. H. Russo, 160 Sherman Ave., New York 34, N. Y.

WANTED—Transmitter-receiver for private aircraft. Must be 6V, and perfect. Either 1-f or VHF xmitter, and 200-400kc. rec. State price. John W. Findarle, Rt. 1, Box 1061-G, Modesto, Calif.

We're Doing Our Best to Keep Up With the Demand

AND THE DEMAND IS PHENOMINAL — far beyond our material limitations . . . but be patient and your order will be delivered. We are distributing TELE-ROTORS uniformly throughout all TV areas . . . so wait . . . don't compromise with quality. **YOU CAN'T BEAT A TELE-ROTOR!**

CONSISTENTLY DEPENDABLE ROTATORS

TELE-ROTOR

This heavy-duty TELE-ROTOR has no match! It's more powerful . . . will turn any TV antenna array under any weather conditions. Easily installed . . . it is trouble-free in performance. Easiest of all to operate!

MODEL TR-2 . . . . . rotator with "compass control" cabinet having illuminated "perfect pattern" dial . . . (uses 8 wire cable) $49.95

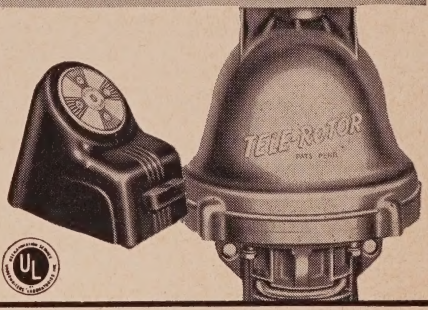

CONSISTENTLY DEPENDABLE ROTATORS

TELE-ROTOR CUB

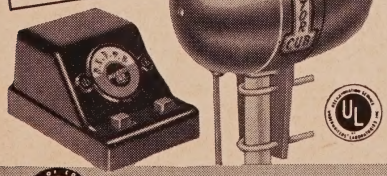

The new TELE-ROTOR "CUB" is ideal for average installations. The same husky motor as the Heavy-Duty model . . . the "CUB" is the fastest and easiest of all rotators to install. All-In-Line design . . . with true in-line thrust between antenna and mast. The ¾" STEEL shaft rotates on a case hardened steel ball . . . with inline reamed oiless bearings.

MODEL 502A . . . . . rotator with plastic control cabinet having indicating meter for "hairline" tuning. (Uses 5 wire cable) $44.95

MODEL 501A . . . . . rotator with control cabinet having end-of-rotation signal. Light flashes every 7.2° showing antenna is turning. (Uses 5 wire cable) $34.95

CORNELL-DUBILIER SOUTH PLAINFIELD, N. J.

THE RADIART CORPORATION CLEVELAND 2, OHIO

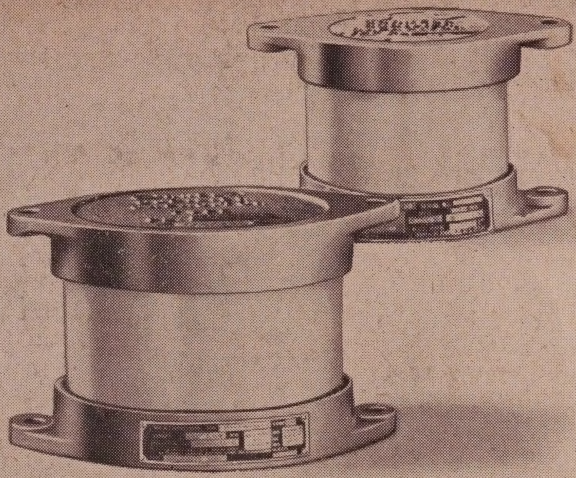

STILL THE FINEST for all broadcast applications!

only C-D and Faradon*

high power mica transmitter capacitors have all these features:

Low loss, white glazed ceramic, cylindrical case Provides long creepage path between terminals. Minimum size for safe rating. Eliminates bushings and corona troubles. Impervious to climatic changes. Uniform voltage gradient distribution.

Cast aluminum end-cap terminals — Low resistance, wide path, positive contact. Permits space-saving mounting for series, parallel, and series-parallel connection.

- **India ruby mica tested electrically and gauged for uniform thickness** — Assures low power-factor, high voltage breakdown and equalized loading.
- **Individual sections tested for voltage and capacity** — Assures uniform loading.
- **Patented series mica stack**—Eliminates corona and affords uniform voltage gradient.
- **Vacuum impregnated assembly** — Provides high insulation, low losses, no air voids.
- **Special low-loss filler** — Reduces stray field losses and protects against humidity.

Type 51 capacitors and other C-D capacitors, including Faradon types manufactured exclusively by Cornell-Dubilier, available through all authorized C-D distributors. Write for catalog.
CORNELL-DUBILIER ELECTRIC CORP., South Plainfield, N. J.

41ST ANNIVERSARY CORNELL-DUBILIER CAPACITORS

CORNELL-DUBILIER
CAPACITORS
BEST BY FIELD TEST

*® 1910 1951

RADIART SUBSIDIARY

PRINTED IN U.S.A.

Other plants: New Bedford, Cambridge and Worcester, Mass.; Providence, R. I.; Indianapolis, Ind. and subsidiary, The Radiart Corp., Cleveland, Ohio